




CTL LEATHER
Your Partner in Design

BOMBAY

CLASSIC LEATHER

Inspired by the bustling streets of
India, the Bombay collection
boasts versatility — great for
a variety of applications.

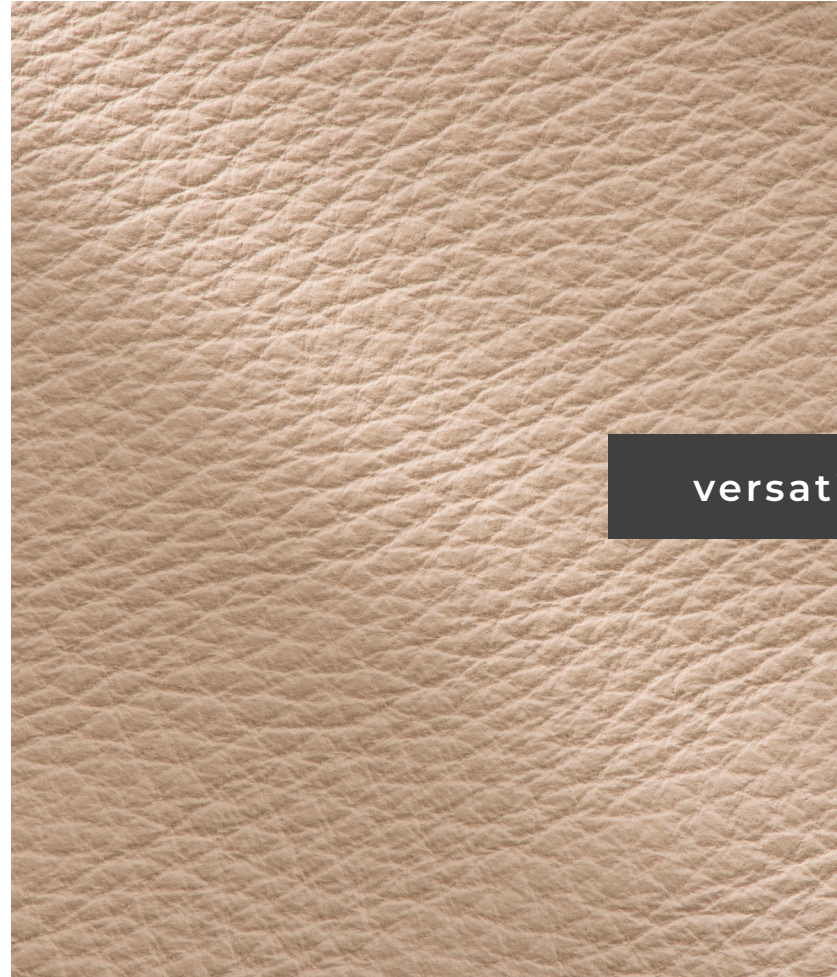

versatile in use

wheat



E X C E L L E N T

D U R A B I L I T Y

L O W

M A I N T E N A N C E

ashphalt



clove



doe

An attractive, economical corrected grain leather, with a plain pigmented finish that offers ideal light fastness, stain protection and a soft feel.




cordovan




**IDEAL LIGHT
FASTNESS**




phantom




blueberry



marina

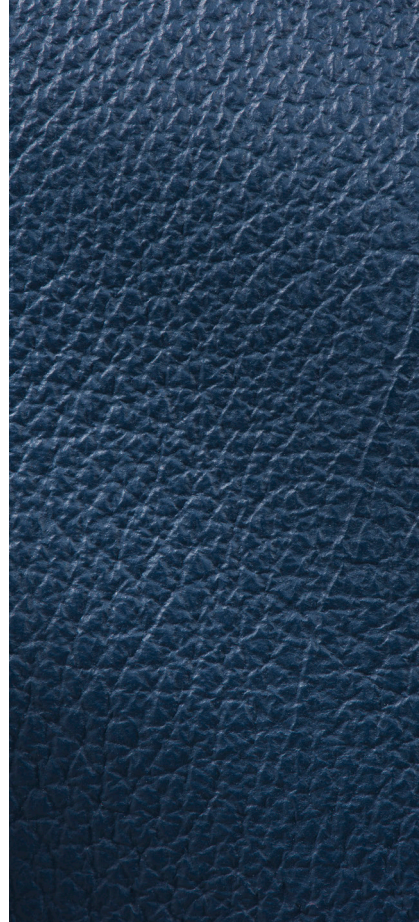

marina

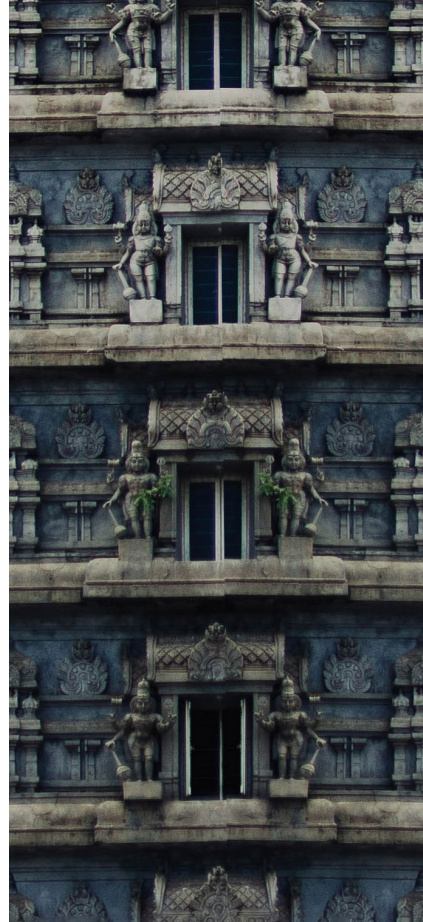

ash




EXCELLENT WEAR

| Property | Test Method | Result |
|------------------------------------|-------------|--------------------|
| Average Thickness | ISO 2589 | 0.8 - 1.0mm |
| Color Fastness to Artificial Light | ISO 105 B02 | min 4 (Blue Scale) |
| Finish Adhesion | ISO 11644 | min 2 N/10mm |





cloud

Excellent durability with minimal maintenance. This top coated leather is very durable and will provide excellent wear characteristics for high traffic areas, if maintained properly. Suitable for domestic and general contract use.

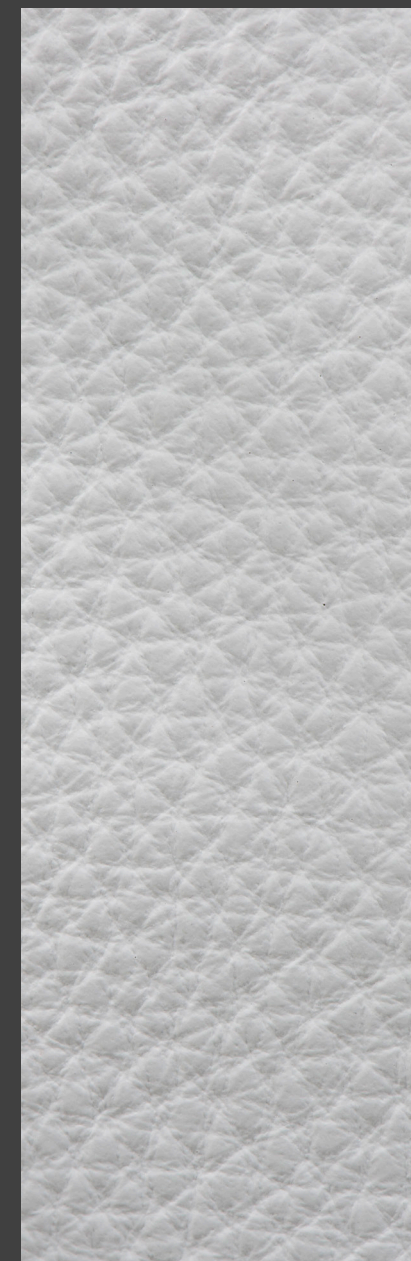

pigeon


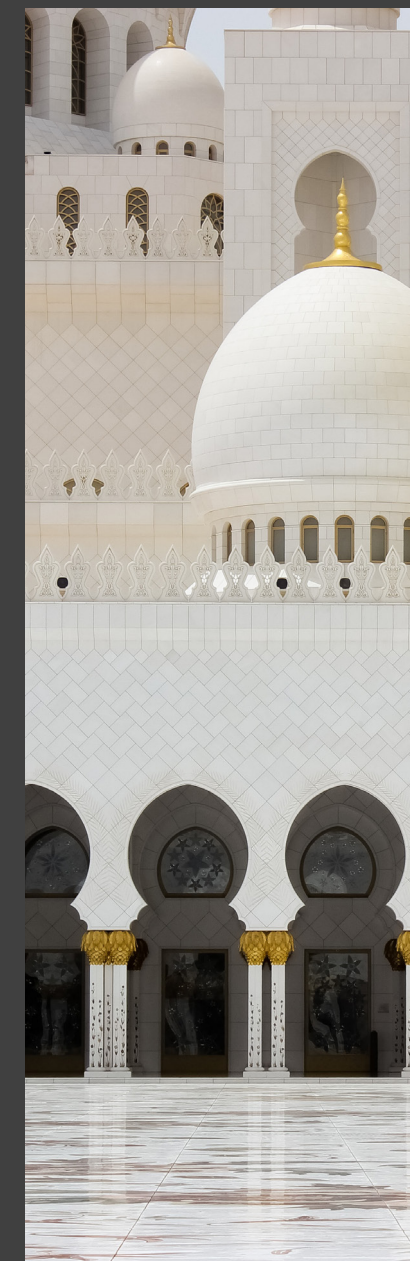


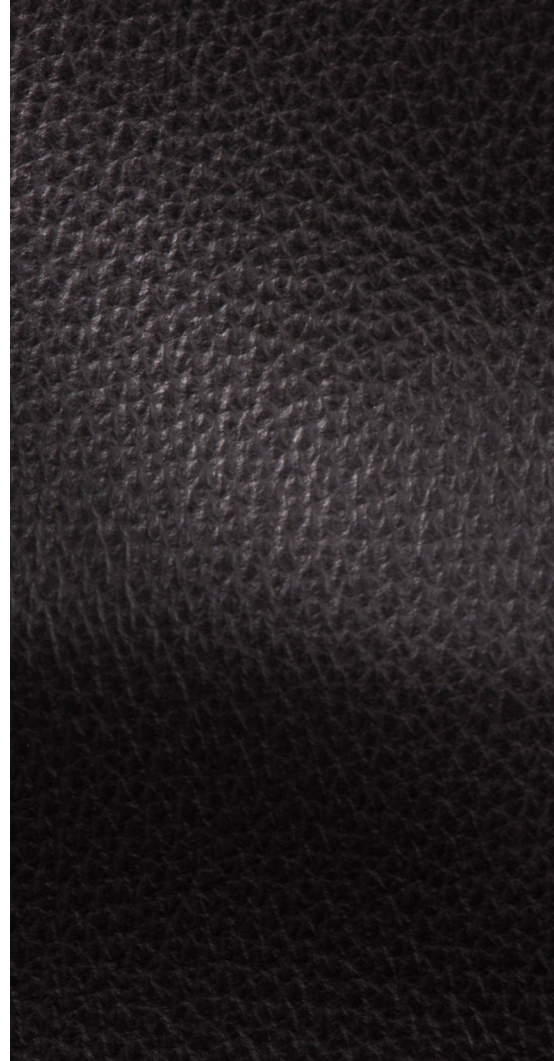

bison



scarlet

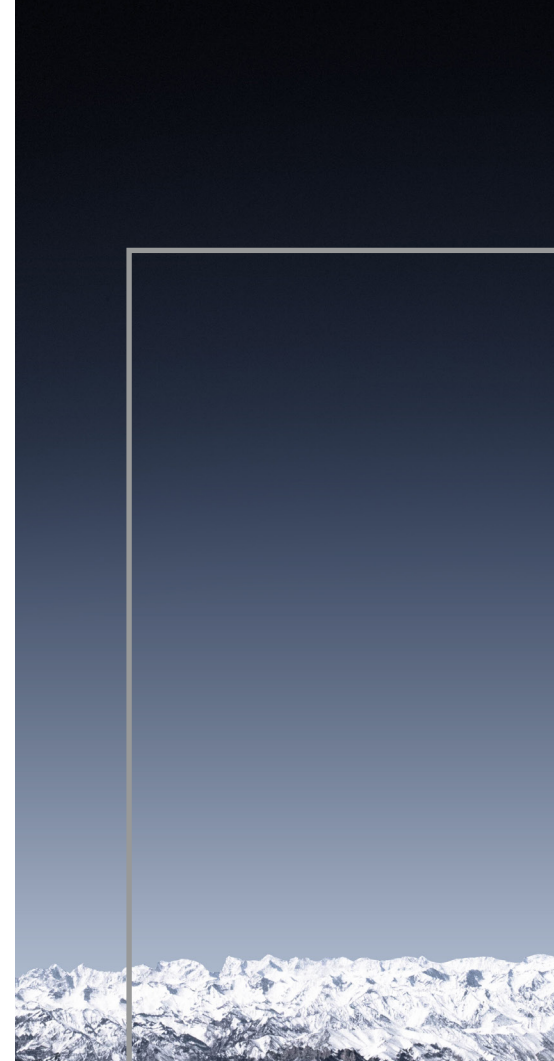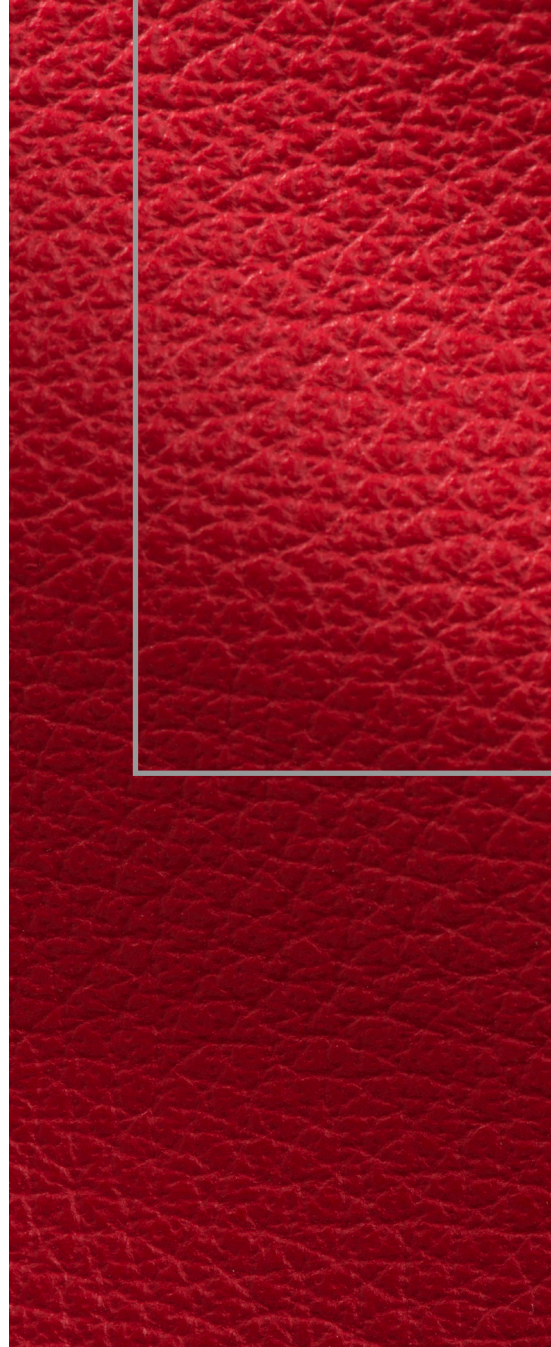


blueberry



phantom

turtle

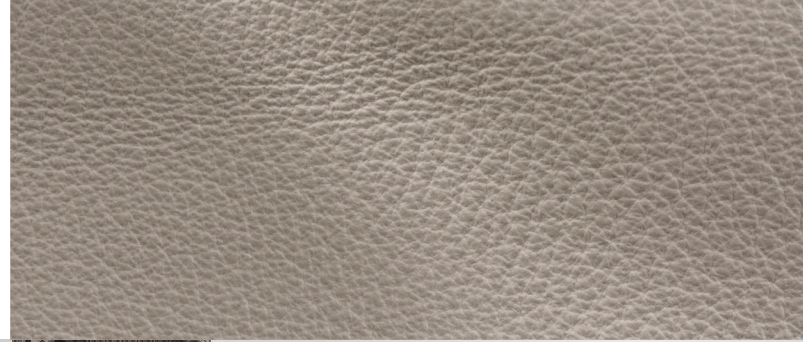

linen

PROPERTIES

| Property | Test Method | Result |
|---|---------------------|--|
| Average Thickness | ISO 2589 | 0.8 - 1.0mm |
| Color Fastness to Artificial Light | ISO 105 B02 | min 4 (Blue Scale) |
| Color Fastness to Rubbing (500 Dry, 250 Wet, 80 Perspiration) | ISO 11640 | 4 (Grey Scale), 3-4 (Grey Scale), 3-4 (Grey Scale) |
| Finish Adhesion | ISO 11644 | min 2 N/10mm |
| Tear Strength | ISO 3377-2: 2002 | min 20N |
| Flexing Endurance (min 50,000 cycles) | ISO 5402 | No finish cracks at 50,000 cycles |
| Water Spotting | ISO 15700 | GSR 3 (no residual halo or blistering of finish) |
| Cold Crack | ISO IUP 29: 1996 | No finish cracks -15°C |
| Determination of pH | ISO 4045: 2008 | min 3.2 |
| Ignitability BS 5852-0 (Cigarette) | BS 5852:1979 | Pass |
| Ignitability BS 5852-1(Match) | BS EN 1021-1-2:2006 | Pass |
| Ignitability BS 5852-5 (Wooden Crib) | BS 5852-5 | Pass |
| California Technical Bulletin | CAL 117:2003 | Class 1 |

turtle



wheat



linen



STAIN PROTECTION

Smaller hide sizes should be taken into account when developing patterns with this article




Ash



Asphalt




Bison




Blueberry




Cloud



Clove




Cordovan




Doe




Linen



Marina




Phantom



Pigeon



Scarlet



Turtle



Wheat

Content
Top Grain, Embossed
(Madras)

Finish
Solid, Pigmented

Raw Material
Buffalo

Average Hide Size
35 sq ft

Clean
Soft Cleaner

Protect
Protection Cream

NOTE: Due to color variations on different monitors and color printers, before making exact color and texture matches, we recommend that you request an actual sample to ensure proper color representation as many monitors and printers cannot print colors accurately. CTL Leather is not responsible for color selections made from this lookbook.