



LODGE

PRESTIGE COLLECTION



LODGE

PRESTIGE COLLECTION

D E S I G N E D
T O I M P R O V E
W I T H A G E

acorn




LODGE COLLECTION




Lodge is an old world aged leather with a buttery hand. Aniline dyed for color, Lodge then receives a unique oil and wax treatment to create the dramatic crackle effect.



sandalwood

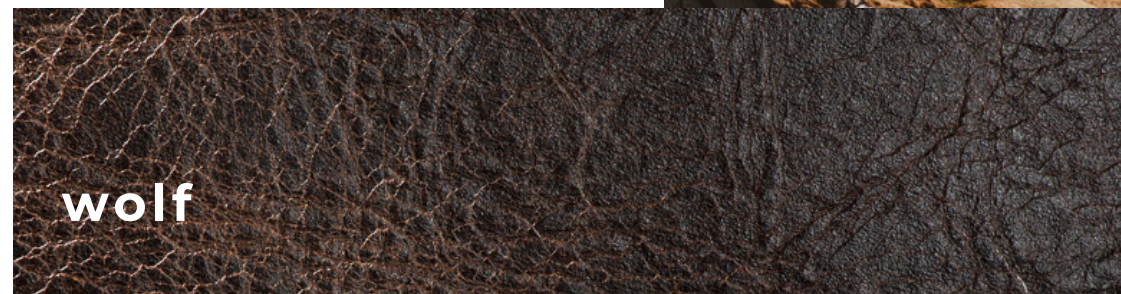


wolf

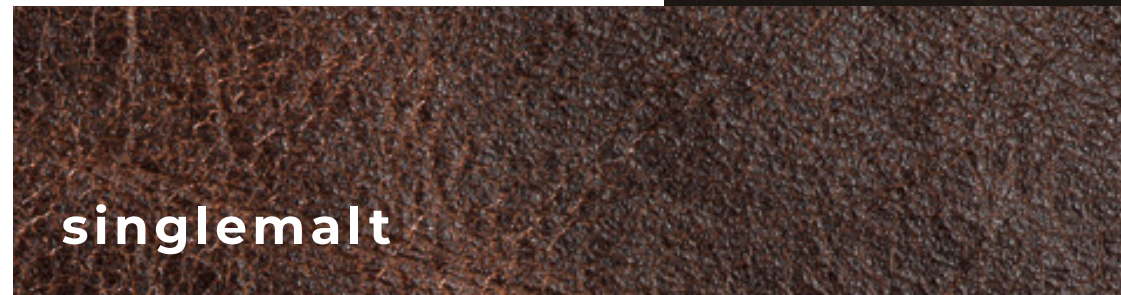

singlemalt




EUROPEAN COWHIDES

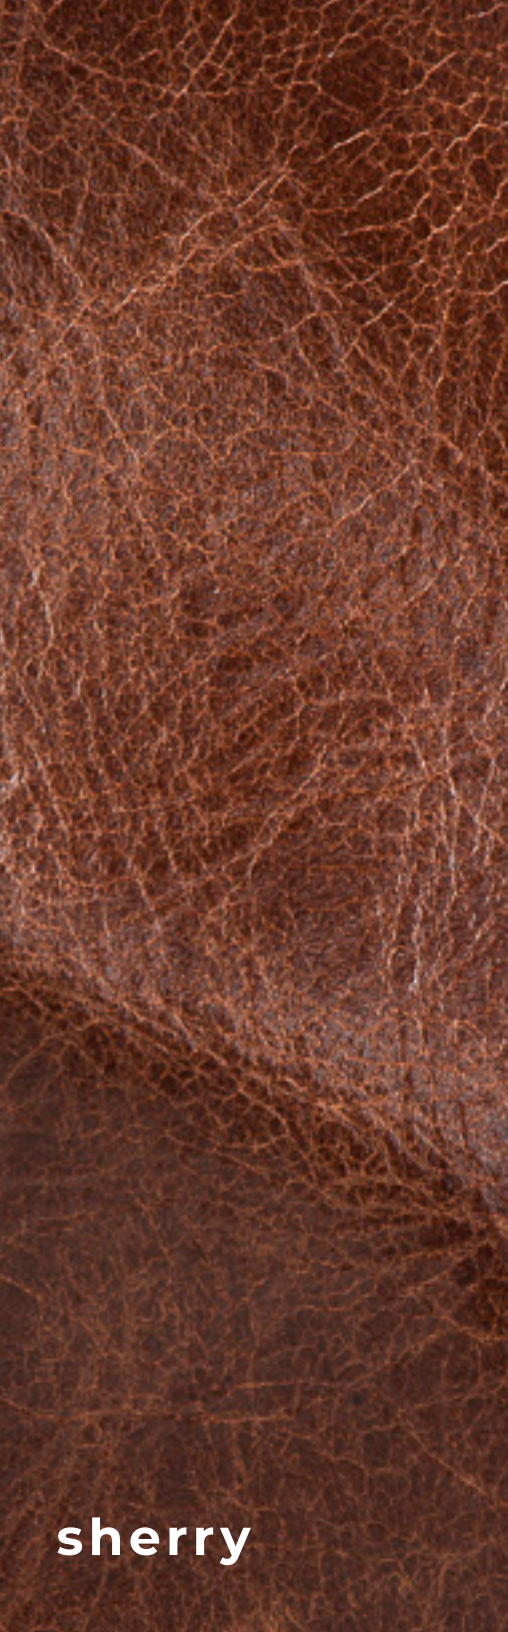

sherry

atlantic

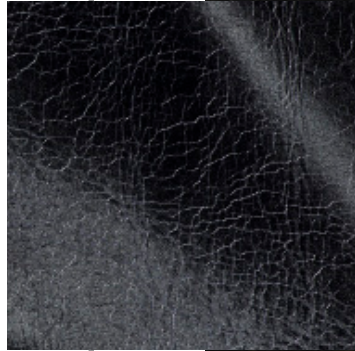

ivy



haze



driftwood



Offering a traditional appeal featuring a rich mix of color, the Lodge collection is a versatile leather perfect for today's shifting styles.

Produced on select European cowhides, natural characteristics such as healed scars blend with the natural look of Lodge. Every hide will have an individual personality with the evident touches of mother nature.

This leather will only improve with age and provide a rich distressed look for years to come.




LODGE COLLECTION


petrol



Acorn




Cornflower



Petrol



Sherry




Atlantic




Driftwood



Sandalwood



Single Malt



Coal Haze



Ivy



Sandbank



Wolf

NOTE: Due to color variations on different monitors and color printers, before making exact color and texture matches, we recommend that you request an actual sample to ensure proper color representation as many monitors and printers cannot print colors accurately. CTL Leather is not responsible for color selections made from this lookbook.

Average Hide Size

50 FT2 (4.65m2)

Country of Origin

Italy

Content

Aniline, Pull-Up

FinishCrackle Effect,
Wax Pull Up**Raw Material**

South American

Clean

Soft Cleaner

Protect

Protection Cream

Hide Type

Bovine

Configuration

Whole Hide

Grain

Buffed

H I D E S W I T H

I N D I V I D U A L

P E R S O N A L I T Y

cornflower

PROPERTIES

Property	Test Method	Result
Average Thickness	ISO 2589	0.9 - 1.1 mm
Tensile Strength	ISO 3376	na
Elongation at Break	ISO 3376	Traction > 11N/mmsq.
Tear Strength	ISO 3377-2	> 40/Nmm
Flexing Endurance	ISO 5402	No Visible Cracking
Colour Fastness to Artificial Light (Xenotest 72 Hrs.)	ISO 105 B 02	3/4 (Grey Scale)
Colour Fastness to Rubbing (50 Dry Rubs, 20 Wet Rubs)	ISO 11640 , ISO 11640	50 Cycles, 20 Cycles
California Technical	Cal Tech Bulletin 117-2013	Class 1
Cigarette Ignition Resistance	UFAC/NFPA 260	Class 1
Boston Fire Dept	BFD IX-I	Pass
Wyzenbeek - (Oscillatory Cylinder Method) @ 3,000 cycles	ASTM D 4157.13	Pass