



— PALMA —

VINTAGE COLLECTION




A vintage outdoor dining set is arranged in a courtyard. The set includes two square tables and four chairs with wicker backs and red cushions. A red bicycle is parked against a tree in the background. The scene is set against a light-colored wall with a blue sign that reads 'H CIUDAD'. The ground is paved with cobblestones, and there are several potted plants and trees in the courtyard.

# PALMA

VINTAGE COLLECTION



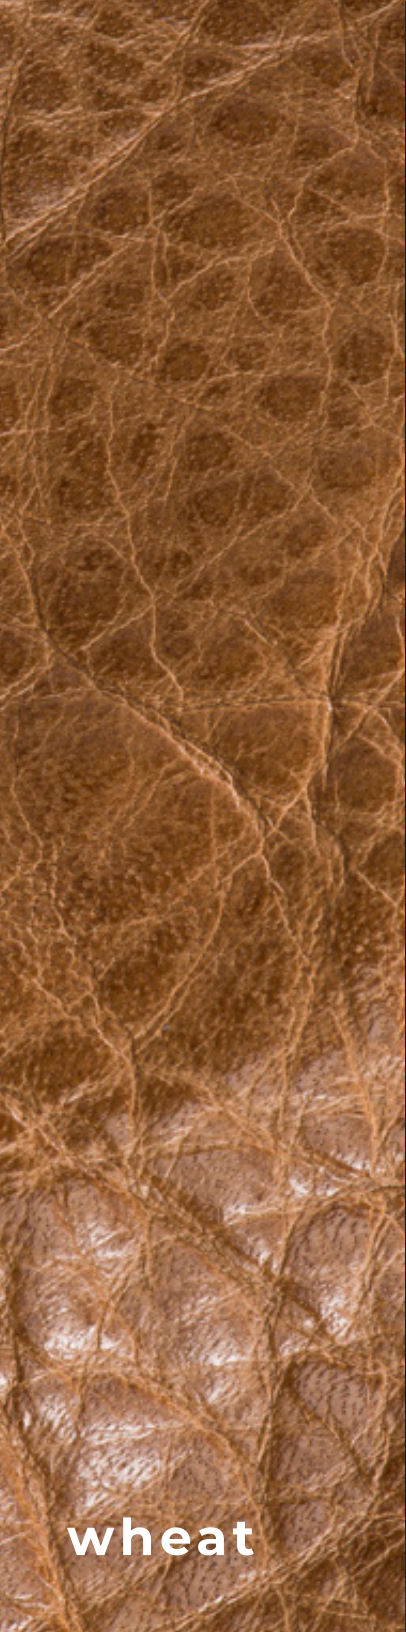

wheat



rune



**STRONG &  
DURABLE LEATHER**



chili



Milled during tanning creates a fabulous natural tipped grain achieved in the drums.

Wonderful contrasts in colour and tipped effect within the hide offers a 'manly' look that may be used for various applications whether it be a travel bag, or a wing chair.





sable



C O N T I N U E S T O  
B U R N I S H A N D  
P O L I S H O V E R  
T I M E

PALMA COLLECTION

summer berry



leafy green

Ioden

**BECOMES RICHER  
WITH AGE**






chili



Castano



Loden



Sable



Wheat




Chili



Moreno




Seafoam



Leafy Green



Rune



Summer Berry

**Average Hide Size**  
50 FT2 (4.65m2)

**Country of Origin**  
Italy

**Content**  
Solid, Wax Pull Up

**Finish**  
Aniline, Oil Pull Up

**Raw Material**  
European

**Clean**  
Soft Cleaner

**Protect**  
Protection Cream

**Hide Type**  
Bovine

**Configuration**  
Whole Hide

**Grain**  
Full

**Rejuvenate**  
Oleosa

*NOTE: Due to color variations on different monitors and color printers, before making exact color and texture matches, we recommend that you request an actual sample to ensure proper color representation as many monitors and printers cannot print colors accurately. CTL Leather is not responsible for color selections made from this lookbook.*



palma, spain





summer berry

Property	Test Method	Result
Average Thickness	ISO 2589	1.0 - 1.2mm
Tensile Strength	ISO 3376	> 10 N/mm to > 12 N/mm
Elongation at Break	ISO 3376	40 - 70 %
Tear Strength	ISO 3377	-1 30 - 40 N
Flexing Endurance (after 20,000 flex)	ISO 5402	> 20,000 Flex
Colour Fastness to Artificial Light (Xenotest 72 Hrs.)	ISO 105 B 02	2 (Blue Scale)
Colour Fastness to Rubbing (500 Dry Rubs, 100 Wet Rubs)	ISO 11640 , ISO 11640	4-5 > 3 (Grey Scale), 4 >3 (Grey Scale)
Ignitability BS 5852-1 (Cigarette)	BS 5852:1 EN 1021:1	Pass
Ignitability BS 5852-2 (Match)	BS 5852:2 EN 1021:2	Pass
California Technical	Cal Tech Bulletin 117	Class 1
Cigarette Ignition Resistance	UFAC/NFPA 260	Class 1
Boston Fire Dept	BFD IX-I	Pass
Wyzenbeek - (Oscillatory Cylinder Method) @ 54,000 cycles	ASTM D 4157.07	Pass
Ignitability BS 5852-5 (Wooden Crib)	BS 5852-5	Treatable