



ROXY

ESSENTIAL LEATHER



ROXY4

ESSENTIAL LEATHER



ROXY COLLECTION

S L I G H T A N D
C O N T R O L L E D
O I L P U L L - U P
E F F E C T

timber brown

Roxy has a unique softness and natural hand similar to a full aniline leather with a slight luster.






brulee



puma



raven



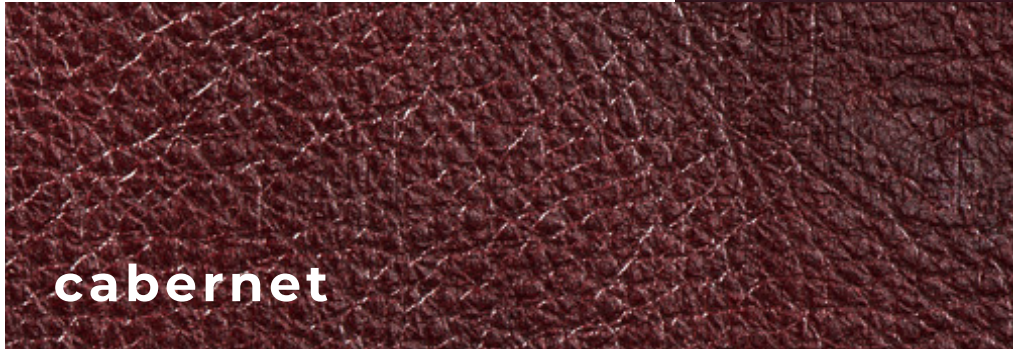


cabernet



red garnet


Roxy is the perfect leather for traditional, contemporary and applications everywhere inbetween.

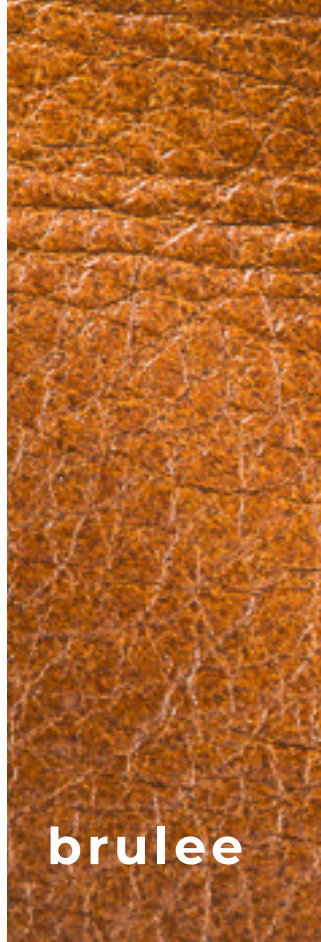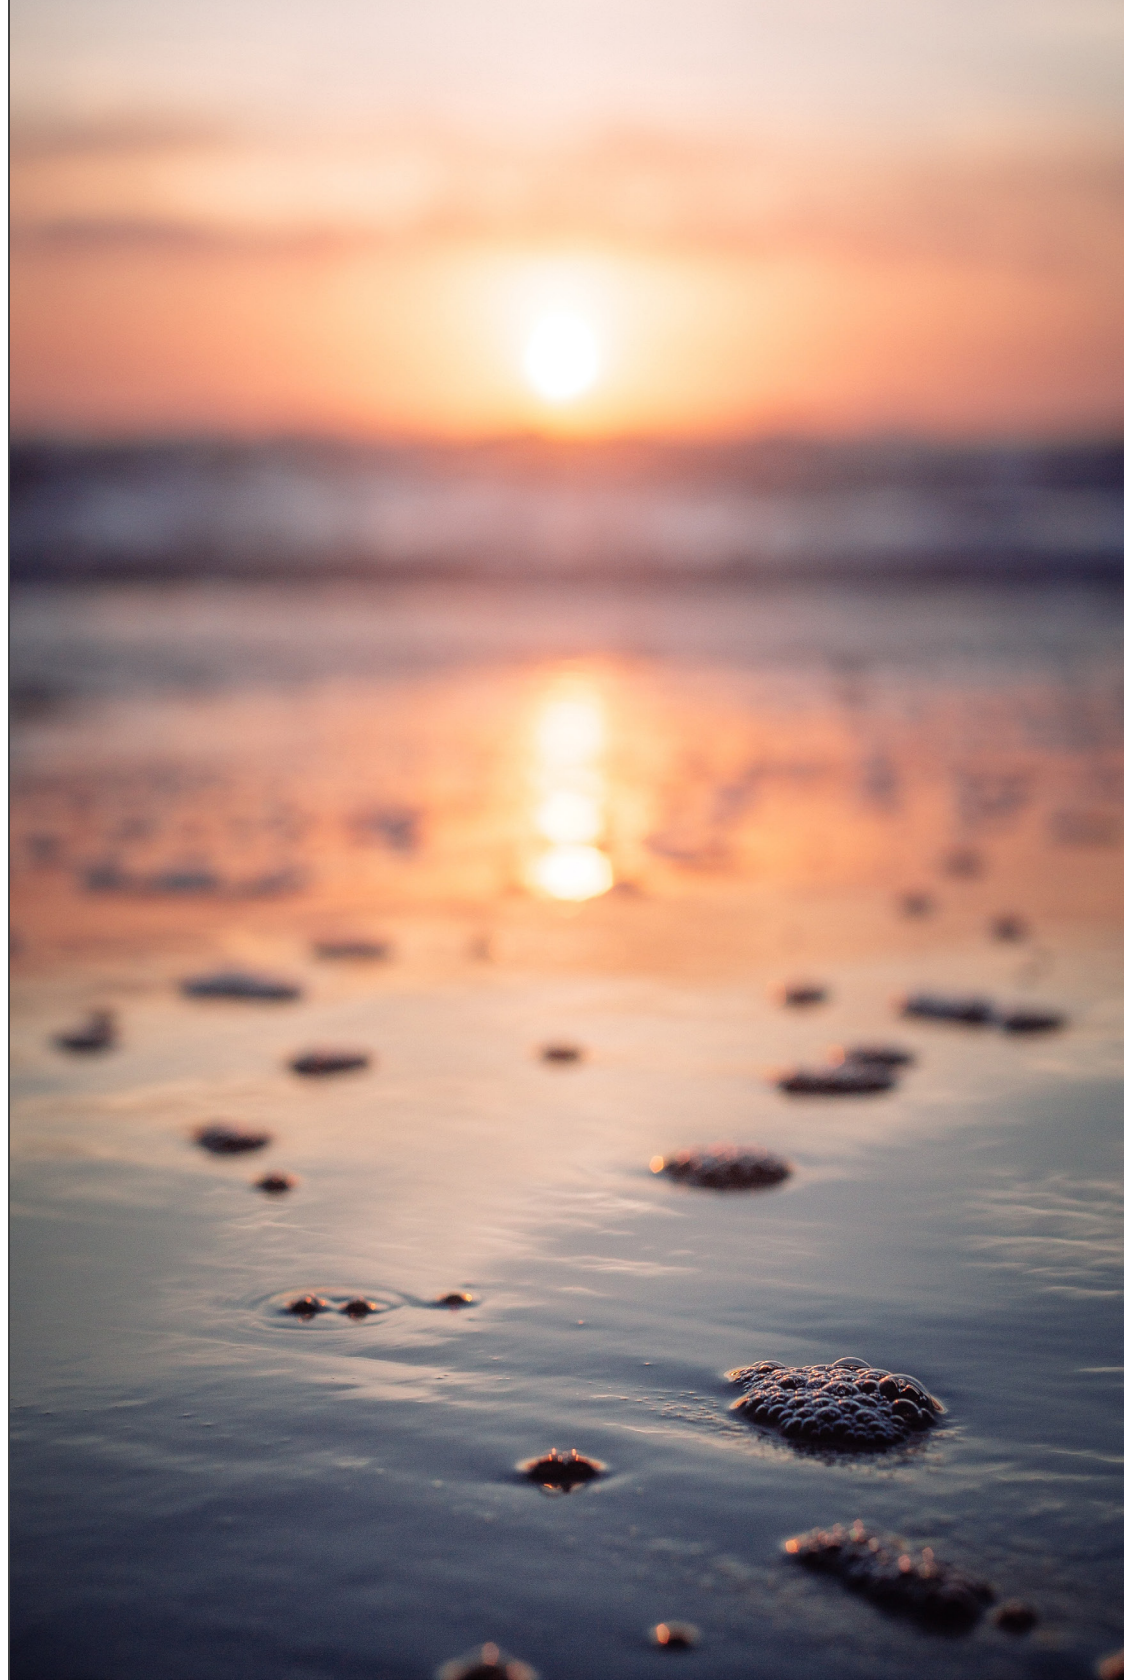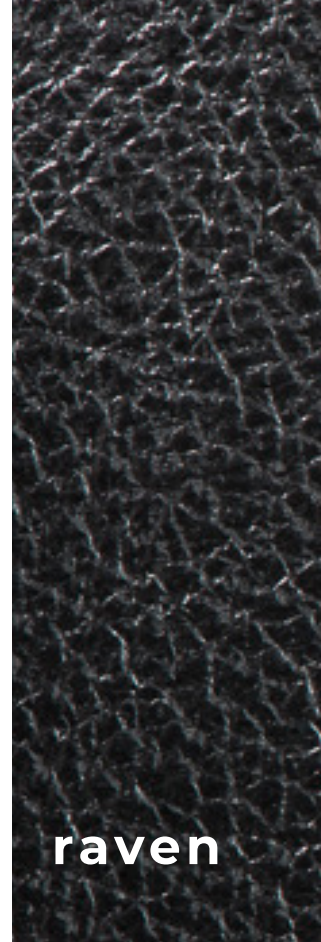

Brulee



Cabernet




Henna



Puma



Raven



Red Garnet



Timber Brown




Caviar




Dijon



Seafoam



Tiger



Watermelon

Content
Semi-Aniline, Pull Up

Finish
Slightly Buffed, Semi Gloss

Raw Material
South American

Average Hide Size
50 FT2

NOTE: Due to color variations on different monitors and color printers, before making exact color and texture matches, we recommend that you request an actual sample to ensure proper color representation as many monitors and printers cannot print colors accurately. CTL Leather is not responsible for color selections made from this lookbook.



PROPERTIES

Property	Test Method	Result
Average Thickness	ISO 2589	0.8 - 1.0 mm
Tensile Strength	ISO 3376	min. 10 N/mm ²
Elongation at Break	ISO 3376	min 35%
Tear Strength	ISO 3377-2	min. 20 N
Flexing Endurance	ISO 5402	20000
Colour Fastness to Artificial Light	ISO 105 B 02	min. 2/3 (Blue Scale Value)
Colour Fastness to Rubbing (20 Sweat)	ISO 11640	4 (Grey Scale Value)
Finishing Adhesion	ISO 11644	N/A
Determination of pH	ISO 4045	min. 3,5
Ignitability BS 5852-0 (Cigarette)	EN 1021-1	Pass
Ignitability BS 5852-1 (Match)	EN 1021-2	Pass
California Technical	Cal Tech Bulletin 117	Class 1
Cigarette Ignition Resistance	UFAC/NFPA 260	Class 1
Boston Fire Dept	BFD IX-I	Pass
Wyzenbeek - (Oscillatory Cylinder Method) @ 70,000 cycles	ASTM D 4157.10	Pass