




A vintage-style courtyard scene. In the foreground, a red bicycle is parked next to a tree. To the right, there is an outdoor seating area with two wooden tables and four wicker chairs with red cushions. A small potted plant sits on one of the tables. In the background, a building with a light blue facade and black window grilles is visible. A sign with the letter 'H' and the word 'CIUDAD' is mounted on the wall. The ground is paved with cobblestones, and several trees and potted plants are scattered throughout the courtyard.

— P A L M A —

VINTAGE COLLECTION

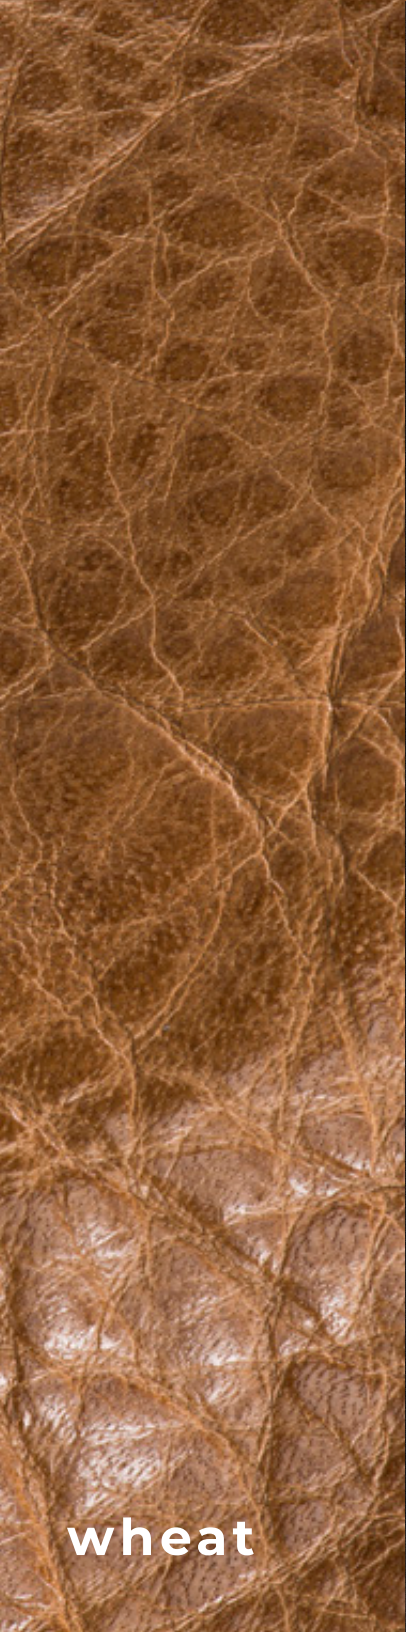


wheat



rune



**STRONG &
DURABLE LEATHER**

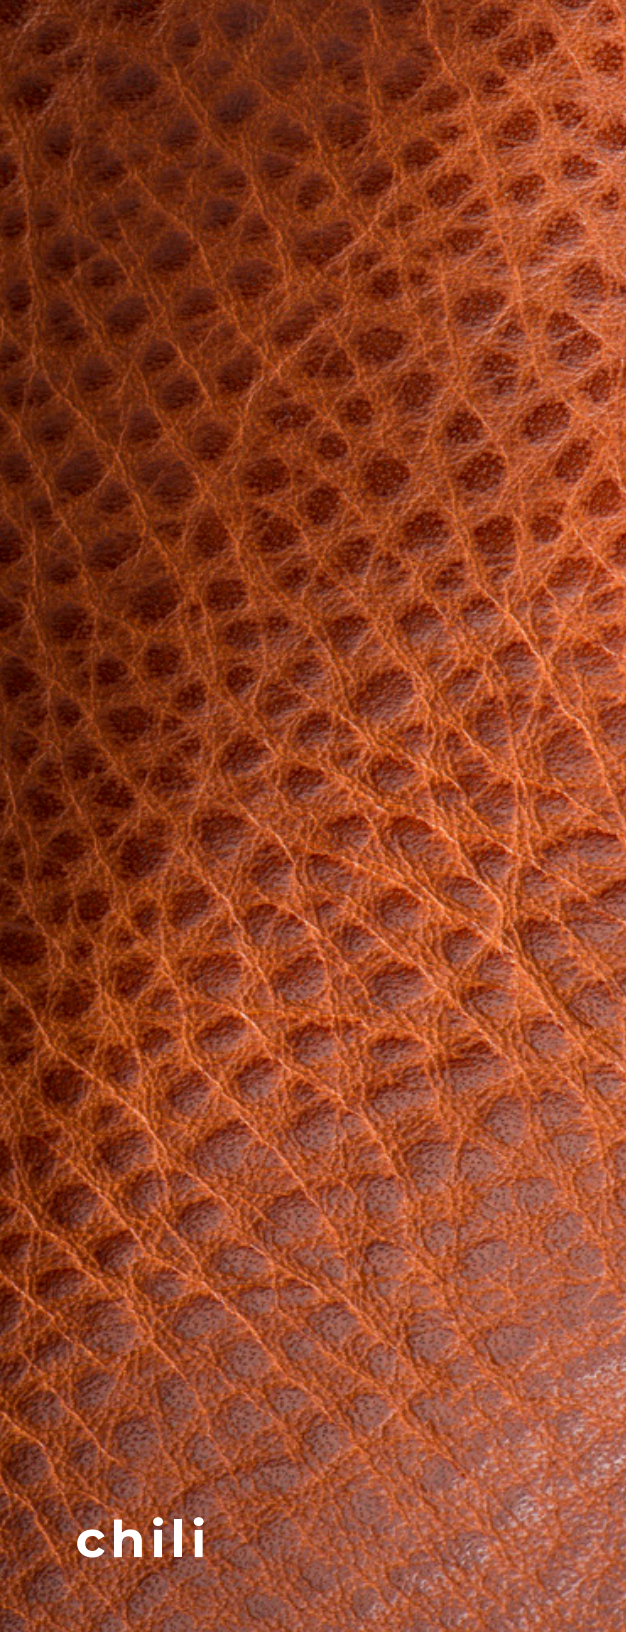

chili

Milled during tanning creates a fabulous natural tipped grain achieved in the drums.

Wonderful contrasts in colour and tipped effect within the hide offers a 'manly' look that may be used for various applications whether it be a travel bag, or a wing chair.

PALMA COLLECTION



castano

sable
black



C O N T I N U E S T O
B U R N I S H A N D
P O L I S H O V E R
T I M E

PALMA COLLECTION

summer berry

leafy green

Ioden

BECOMES RICHER
WITH AGE






Castano



Loden




Wheat




Chili



Sable Black



Summer Berry



Leafy Green



Rune

chili

NOTE: Due to color variations on different monitors and color printers, before making exact color and texture matches, we recommend that you request an actual sample to ensure proper color representation as many monitors and printers cannot print colors accurately. CTL Leather is not responsible for color selections made from this lookbook.

Content

Solid, Wax Pull Up

Finish

Aniline, Oil Pull Up

Raw Material

European

Average Hide Size

50 FT2 (4.65m2)

Country of Origin

Italy

Clean

Soft Cleaner

Protect

Protection Cream

Hide Type

Bovine

Configuration

Whole Hide

Grain

Full

Rejuvenate

Oleosa



palma, spain



summer berry

Property	Test Method	Result
Average Thickness	ISO 2589	1.0 - 1.2mm
Tensile Strength	ISO 3376	> 10 N/mm to > 12 N/mm
Elongation at Break	ISO 3376	40 - 70 %
Tear Strength	ISO 3377	-1 30 - 40 N
Flexing Endurance (after 20,000 flex)	ISO 5402	> 20,000 Flex
Colour Fastness to Artificial Light (Xenotest 72 Hrs.)	ISO 105 B 02	2 (Blue Scale)
Colour Fastness to Rubbing (500 Dry Rubs, 100 Wet Rubs)	ISO 11640 , ISO 11640	4-5 > 3 (Grey Scale), 4 >3 (Grey Scale)
Ignitability BS 5852-1 (Cigarette)	BS 5852:1 EN 1021:1	Pass
Ignitability BS 5852-2 (Match)	BS 5852:2 EN 1021:2	Pass
California Technical	Cal Tech Bulletin 117	Class 1
Cigarette Ignition Resistance	UFAC/NFPA 260	Class 1
Boston Fire Dept	BFD IX-I	Pass
Wyzenbeek - (Oscillatory Cylinder Method) @ 54,000 cycles	ASTM D 4157.07	Pass
Ignitability BS 5852-5 (Wooden Crib)	BS 5852-5	Treatable