



# LODGE

**PRESTIGE COLLECTION**





# LODGE

**PRESTIGE COLLECTION**



D E S I G N E D  
T O I M P R O V E  
W I T H A G E

acorn



LODGE COLLECTION





Lodge is an old world aged leather with a buttery hand. Aniline dyed for color, Lodge then receives a unique oil and wax treatment to create the dramatic crackle effect.



sandalwood

wolf


single malt

# EUROPEAN COWHIDES

sherry




**atlantic**

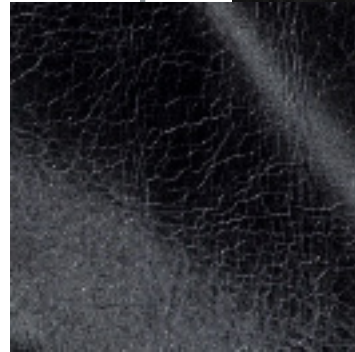


**ivy**



**haze**

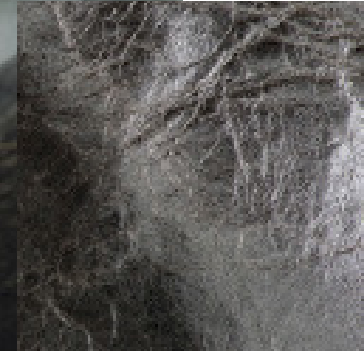

**driftwood**

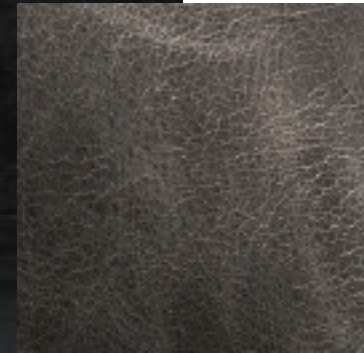

Offering a traditional appeal featuring a rich mix of color, the Lodge collection is a versatile leather perfect for today's shifting styles.






Produced on select European cowhides, natural characteristics such as healed scars blend with the natural look of Lodge. Every hide will have an individual personality with the evident touches of mother nature.

This leather will only improve with age and provide a rich distressed look for years to come.

petrol



Acorn




Cornflower




Petrol




Sherry



Sunset



Atlantic




Driftwood



Sandalwood



Single Malt



Swiss Pine



Coal Haze




Ivy



Sandbank




Wolf




Chiffon

*NOTE: Due to color variations on different monitors and color printers, before making exact color and texture matches, we recommend that you request an actual sample to ensure proper color representation as many monitors and printers cannot print colors accurately. CTL Leather is not responsible for color selections made from this lookbook.*






Fireworks




Tiger



Trout



Cognac




Maya Blue



Husk



Crème Brulee



Molasses





Average Hide Size  
50 FT2 (4.65m2)

Country of Origin  
Italy

Content  
Aniline, Pull-Up

Finish  
Crackle Effect,  
Wax Pull Up

Raw Material  
South American

Clean  
Soft Cleaner

Protect  
Protection Cream

Hide Type  
Bovine

Configuration  
Whole Hide

Grain  
Buffed

H I D E S   W I T H  
I N D I V I D U A L  
P E R S O N A L I T Y  
  
cornflower

PROPERTIES

Property	Test Method	Result
Average Thickness	ISO 2589	0.9 - 1.1 mm
Tensile Strength	ISO 3376	na
Elongation at Break	ISO 3376	Traction > 11N/mmsq.
Tear Strength	ISO 3377-2	> 40/Nmm
Flexing Endurance	ISO 5402	No Visible Cracking
Colour Fastness to Artificial Light (Xenotest 72 Hrs.)	ISO 105 B 02	3/4 (Grey Scale)
Colour Fastness to Rubbing (50 Dry Rubs, 20 Wet Rubs)	ISO 11640 , ISO 11640	50 Cycles, 20 Cycles
California Technical	Cal Tech Bulletin 117-2013	Class 1
Cigarette Ignition Resistance	UFAC/NFPA 260	Class 1
Boston Fire Dept	BFD IX-I	Pass
Wyzenbeek - (Oscillatory Cylinder Method) @ 3,000 cycles	ASTM D 4157.13	Pass